

# COMAR

Optics for the real world

## 04 RQ 01

Right-angle prisms

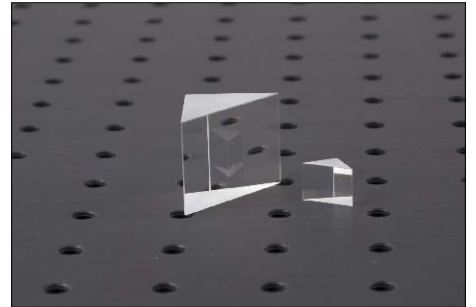


Photo representative of the Right-angle prisms range, and may not show the part 04 RQ 01.

### 04 RQ 01 specification

Entry face size(mm)	4 x 4
Exit face size (mm)	
Coating type	AR coated - The AR-coated range achieves 99% overall efficiency with multilayer coatings for 450-900nm on the entry/exit faces.
Quality	Standard
Inverting/dispersing	
Material	BK7
Angle tolerance (polished faces)	±5min.
Flatness (over inscribed ellipse)	1 lambda
Dimensional tolerance (mm)	±0.1mm
Scratch-dig	40-20
Application	visible and IR
nd	
Vd	