

# COMAR

Optics for the real world

## 100 SQ 25

Quality concave mirrors

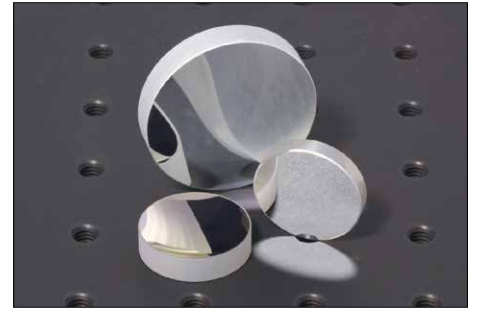


Photo representative of the Quality concave mirrors range, and may not show the part 100 SQ 25.

### 100 SQ 25 specification

Diameter (mm)	25
Diameter tolerance (mm)	+0/-0.2
Length x width (mm)	
Dimensional tolerance (mm)	
Thickness (mm)	
Thickness tolerance (mm)	
Flatness	
Scratch-dig	40-20
Coating	Protected Al - Al/SiOx (visible reflectance 85-90%)
Wavelength range (nm)	
Diameter (minor axis) (mm)	n/a
Major axis (mm)	n/a
Focal length (mm) (+/- 1mm)	100
Radius of curvature (mm)	200
Source to rim plane clearance (mm)	n/a

