

# COMAR

Optics for the real world

## 16 MI 10

General-purpose plane mirrors

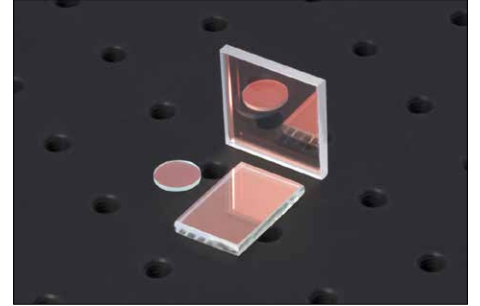


Photo representative of the General-purpose plane mirrors range, and may not show the part 16 MI 10.

### 16 MI 10 specification

|                                    |                                   |
|------------------------------------|-----------------------------------|
| Diameter (mm)                      |                                   |
| Diameter tolerance (mm)            |                                   |
| Length x width (mm)                | 16 x 10                           |
| Dimensional tolerance (mm)         | ±0.3mm                            |
| Thickness (mm)                     | 3                                 |
| Thickness tolerance (mm)           | ±0.25mm                           |
| Flatness                           | 2 lambda over 25mm dia. (typical) |
| Scratch-dig                        | 60-40                             |
| Coating                            | IR-98 all-dielectric              |
| Wavelength range (nm)              | 700-1064                          |
| Diameter (minor axis) (mm)         | n/a                               |
| Major axis (mm)                    | n/a                               |
| Focal length (mm) (+/- 1mm)        | n/a                               |
| Radius of curvature (mm)           | n/a                               |
| Source to rim plane clearance (mm) | n/a                               |

