

# COMAR

Optics for the real world

## 16 YE 25


Quality planoconvex cylindrical lenses



Photo representative of the Quality planoconvex cylindrical lenses range, and may not show the part 16 YE 25.

### 16 YE 25 specification

Dimensions (mm)	25 dia.
Dimensional tolerance (mm)	+0,-0.15
Rod diameter (mm) +/- 10%	n/a
Rod length (mm)	n/a
Focal length (mm)	16
Focal length tolerance (at 587nm)	±2.5%
Back focal length (mm)	13.9
Aperture (mm)	19 x 10
Centre thickness (mm)	n/a
Thickness (thinnest point)	1.5 mm
Spread angle from a 1mm beam	n/a
Scratch-dig	60-40
Centration	0.25mm
Wedge (along axis)	4mrad
Form	Circular
Glass type/material	B270 crown
Coating type	AR coated 450-900nm
Mounted/unmounted	Mounted
Mounting part used	n/a

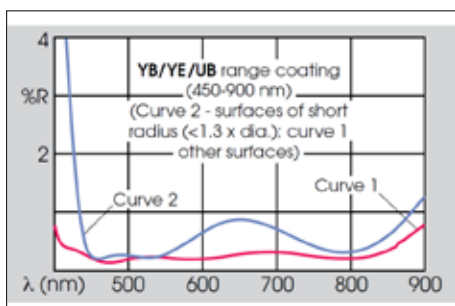

Two typical curves are shown for each coating. Curve 2 applies only to convex surfaces of short radius (R greater than 1.33 x dia.) and Curve 1 to all other surfaces.