

COMAR

Optics for the real world

25 GI 16

ITO coated windows

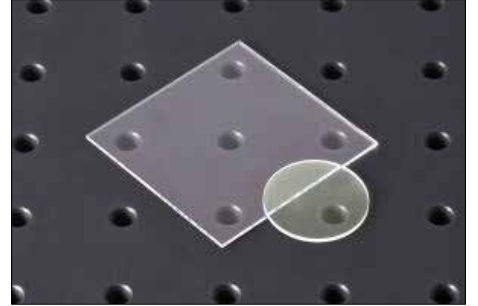


Photo representative of the ITO coated windows range, and may not show the part 25 GI 16.

25 GI 16 specification

Diameter (mm)	
Diameter tolerance (mm)	
Dimensions (mm)	25 x 16
Dimensional tolerance	±0.25
Thickness (mm)	1.1
Thickness tolerance	nominal
Flatness	0.5 lambda over dia. 10mm (typical)
Parallelism	
Scratch-dig	
Material	BK7 or equivalent
Coated sides	One side
Coating type	ITO coated: Square resistance <20 ohms

