

COMAR

Optics for the real world

25 GS 01

UV-silica windows

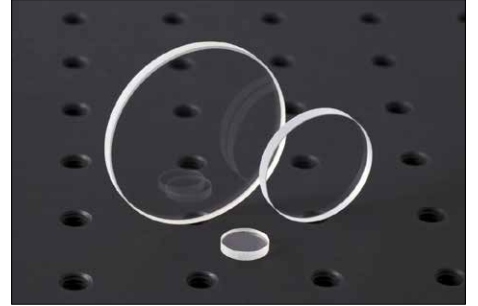


Photo representative of the UV-silica windows range, and may not show the part 25 GS 01.

25 GS 01 specification

Diameter (mm)	25
Diameter tolerance (mm)	+0/-0.2
Dimensions (mm)	
Dimensional tolerance	
Thickness (mm)	3
Thickness tolerance	±0.1mm
Flatness	1 lambda (over 90%)
Parallelism	
Scratch-dig	
Material	UV-grade synthetic fused silica
Coated sides	2
Coating type	AR - coated 248-400nm

