

COMAR

Optics for the real world

40 DQ 25

Positive achromatic doublets

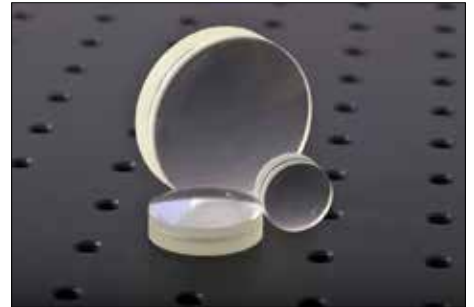


Photo representative of the Positive achromatic doublets range, and may not show the part 40 DQ 25.

40 DQ 25 specification

Diameter (mm)	25
Diameter tolerance (mm)	+0 -0.1mm
Design aperture	24.3
Focal length (mm)	40
Focal length tolerance (at 587nm)	±1%
Back focal length (mm)	34
Centre thickness (mm)	10.5
Edge thickness (mm)	6.1
Centration	0.1mm
Diffraction limited?	No
Scratch-dig	40-20
Coating type	SLAR



Two typical curves are shown for each coating. Curve 2 applies only to convex surfaces of short radius (R greater than 1.33 x dia.) and Curve 1 to all other surfaces.