

COMAR

Optics for the real world

63 SQ 40

Quality concave mirrors

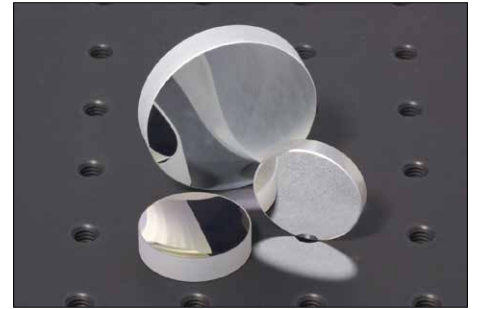


Photo representative of the Quality concave mirrors range, and may not show the part 63 SQ 40.

63 SQ 40 specification

Diameter (mm)	40
Diameter tolerance (mm)	+0/-0.2
Length x width (mm)	
Dimensional tolerance (mm)	
Thickness (mm)	
Thickness tolerance (mm)	
Flatness	
Scratch-dig	40-20
Coating	Protected Al - Al/SiOx (visible reflectance 85-90%)
Wavelength range (nm)	
Diameter (minor axis) (mm)	n/a
Major axis (mm)	n/a
Focal length (mm) (+/- 1mm)	63
Radius of curvature (mm)	126
Source to rim plane clearance (mm)	n/a

